

STEEL-CASTER™

STAINLESS STEEL HOPPER SPREADER



With **SIX sizes to choose from**, there's a FISHER® STEEL-CASTER™ stainless steel hopper spreader that's perfect for any pickup, dump body or flatbed. Engineered for efficiency and designed for durability, these spreaders feature the latest advancements in technology with more standard features built into every model for unbeatable value. And because it's FISHER, count on it to deliver years of heavy-duty reliable service.

STAINLESS STEEL CONSTRUCTION

Built with low-maintenance, rust-resistant stainless steel, the hopper is reinforced with wrap-around welded joints for long-life protection against stress.

DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable and independent control over the conveyor and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing protecting it from corrosion. (Gas and hydraulic options also available).

OTHER STANDARD FEATURES

Inverted V | 16½" Conveyor Width | Top Screen
Tie-Down Ratchet Straps | Dual-Swing Design Chute
Adjustable Chute | Rear Dump Button*
Rear Work Light Button*

*Only available on Electric Models

VARIABLE SPEED CONTROL*

Enhanced dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the hopper is empty or when adjustments are needed, and LEDs make the control easy to read. Its compact size compared to traditional controls fits easily into today's modern truck cab designs.



OPTIONAL ACCESSORIES

License Plate Kit | Work Light Kit
Strobe Light | Vibrator Kit
Tie-Down Chain Kit | 6" Side Extensions

The Legacy Rolls On






WORTH ITS SALT


When it comes to engineering excellence, small details can make a big difference in the efficiency and profitability of your de-icing activity.

INNOVATIVE CHUTE DESIGN

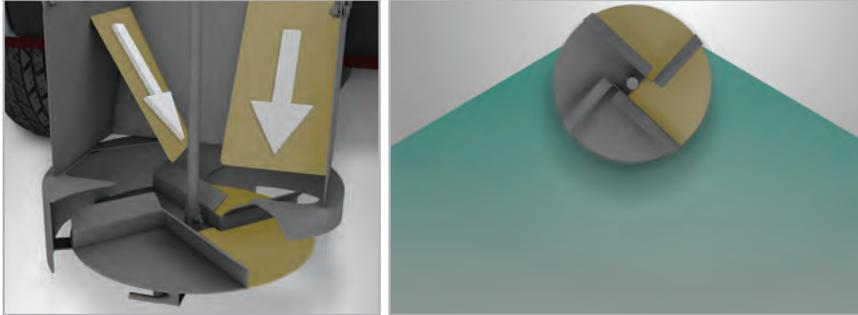

Reduce material waste with this innovative chute design that delivers material to the precise points on the spinner that cast it out and away from the truck, instead of back on your bumper.

CIRCULAR SHUTTER DEFLECTOR

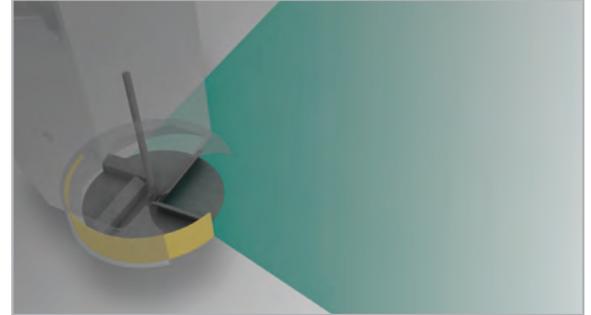

Maximize material control with the easy-to-adjust shutter deflector that allows one-side spreading operation, preventing materials from going where they aren't intended to go.

SPECIFICATIONS

Body Side Length	Capacity	Hopper Construction	Dimensions Overall (LxWxH)	AVAILABLE POWER OPTIONS & APPROX. WEIGHT (EMPTY)				Conveyor Width	Spinner Size	Spreading Width	Materials	Vehicle Application
				Dual 12V DC Sealed Motors	Gas 10.5 hp I/C Briggs & Stratton®	Gas 11 hp I/C Honda®	Dual Hydraulic Motors					
7' (2.13 m)	1.5 cu yd (1.15 cu m)	16 ga SS (1.5 mm)	84" x 50" x 38" (214 cm x 127 cm x 97 cm)	595 lb (269.89 kg)	—	—	—	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
8' (2.44 m)	2.0 cu yd (1.53 cu m)	16 ga SS (1.5 mm)	96" x 50" x 40" (244 cm x 127 cm x 102 cm)	615 lb (278.96 kg)	740 lb (335.66 kg)	740 lb (335.66 kg)	—	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
9' (2.74 m)	3.0 cu yd (2.29 cu m)	16 ga SS (1.5 mm)	108" x 50" x 41" (275 cm x 127 cm x 105 cm)	695 lb (315.25 kg)	820 lb (371.95 kg)	820 lb (371.95 kg)	695 lb (315.25 kg)	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
9' (2.74 m)	4.5 cu yd (3.44 cu m)	16 ga SS (1.5 mm)	108" x 70" x 47" (275 cm x 178 cm x 120 cm)	815 lb (369.68 kg)	940 lb (426.38 kg)	940 lb (426.38 kg)	815 lb (369.68 kg)	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
10' (3.05 m)	4.5 cu yd (3.44 cu m)	16 ga SS (1.5 mm)	120" x 70" x 47" (305 cm x 178 cm x 120 cm)	—	965 lb (437.72 kg)	965 lb (437.72 kg)	840 lb (381.02 kg)	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
10' (3.05 m)	6.0 cu yd (4.59 cu m)	16 ga SS (1.5 mm)	120" x 70" x 54" (305 cm x 178 cm x 138 cm)	—	1010 lb (458.13 kg)	1010 lb (458.13 kg)	885 lb (401.43 kg)	16½" (42 cm)	15½" (40 cm)	Up to 40' (Up to 12.19 m)	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)



Fisher Engineering | 50 Gordon Drive | Rockland, Maine 04841

fisherplows.com |



Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 6,253,470; 7,400,058; 7,737,576. Fisher Engineering offers a limited warranty on all spreaders and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: FISHER®, STEEL-CASTER™.